




HE OEM 2

| 40 | 60

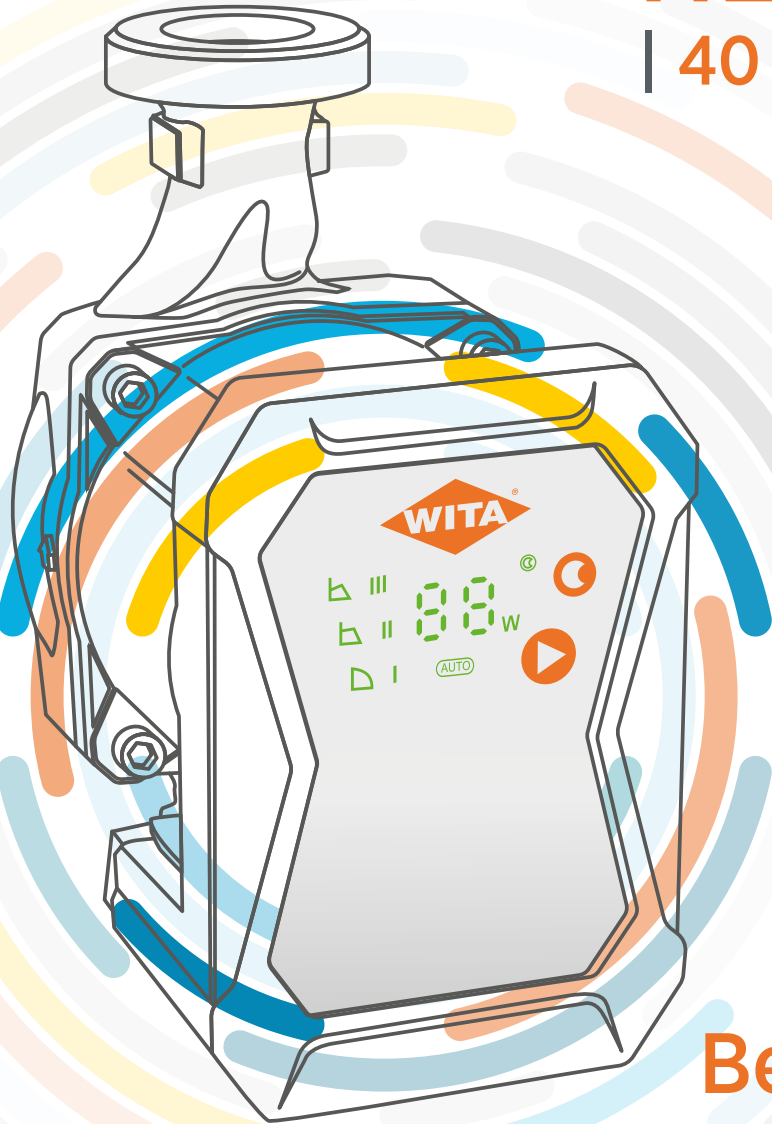


Besprijekorna tehnika
pumpanja....



Značajke proizvoda

- 5 godina jamstva
- Automatsko noćno podešavanje
- SMART ADAPT prilagodba rada
- Izbor raspona snage rada između 4m i 6m
- LED prikaz potrošnje
- Anti-lock funkcija



EEI
≤ 0,20

Tehnički podaci

| 40 | 60

Max. visina dizanja	4 m 6 m
Max. protok	2800 l/h 3600 l/h
Potrošnja energije	3-25 W 3-45 W
Regulacija	3 konstantne karakteristike 2 konstantne brzine, 2 proporcionalne karakteristike pritiska
Dodatne funkcije	automatsko noćno smanjivanje, LED prikaz potrošnje, anti-block funkcija
Napajanje	1 x 230V, 50 Hz
Zaštita motora	nije potrebna vanjska zaštita motora
Razina zaštite	IP 42
Sobna temperatura	0 °C do +40 °C
Temperatura medija	+5 °C do +110 °C
Temperatura razred	TF 110 sukladno DIN EN 60335-2-51
Max. pritisak u sustavu	10 bar
Priključne dimenzije	DN 20, DN 25, DN 32
Ugradbene mjere	130 mm, 180 mm
Materijal kućišta pumpe	sivi lijev kateforezno presvučen
Težina s izolacijom	2,5 kg
EEI	OEM 2 40 60 ≤ 0,20

