

MAKE YOUR VACATION COOL



# CAMPER TRAILER AIR CONDITIONER

ASV-25AS  
ASV-35AS



Wi-Fi control



LED display



Day timer



Comfortable sleep mode



Filter cleaning reminder



Refrigerant



Turbo function for fast cooling



Clock (remote controller)



Self-diagnosis



Stand-by 1W



Swing (flexible adjusting guide louvers)



Two side way air outlet



Dehumidifying mode



Child lock




Inbuilt LED light

## CAMPER TRAILERS SINCLAIR:


- Clean and friendly design
- Manual and remote control
- Powerful cooling, heating and dehumidification
- Quiet operation
- Closable air outlets



## MAKE YOUR VACATION COOL

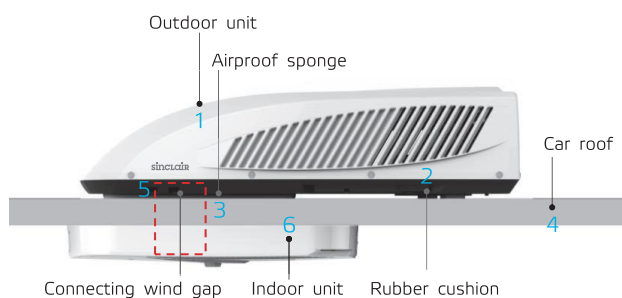

- Possibility of control via Wi-Fi
- Operating temperature 2-43 °C
- For roofs with a thickness of 30-80 mm
- Power supply 220-240V/50Hz/1Ph
- Compressor protection

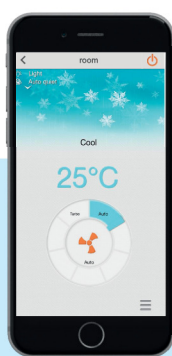

Easy installation of SMART app  
Possibility of 4 device control  
Basic mode control  
Weekly timer



## TECHNICAL PARAMETERS

MODEL			ASV-25AS	ASV-35AS
Capacity cooling / heating	kW		2,5 / 2,2	3,5 / 3,2
Power supply	V / Hz / Ph		~ 220-240 / 50 / 1	~ 220-240 / 50 / 1
Power input cooling / heating	W		1070 / 980	1270 / 1180
Rated power input	W		1400	1550
Power current cooling / heating	A		4,7 / 4,2	5,6 / 5,2
Rated power current	A		6,6	9,5
EER / COP			2,33 / 2,22	2,75 / 2,22
Air flow	indoor	m³ / h	340 / 280 / 220 / 190	380 / 320 / 260 / 230
Air flow	outdoor	m³ / h	600 / 300	600 / 300
Sound pressure level	indoor	dB(A)	53 / 48 / 43 / 38	55 / 49 / 44 / 39
	outdoor	dB(A)	65 / 55	65 / 55
Sound power level	indoor	dB(A)	63 / 58 / 53 / 48	65 / 59 / 54 / 49
	outdoor	dB(A)	75 / 65	75 / 65
Dehumidifying volume	l / h		1,0	1,5
IP protection	outdoor		IPX4	IPX4
Mounting hole in the roof	mm		356 x 356	356 x 356
Thickness of the roof	mm		30 - 80	30 - 80
Refrigerant	type / kg / t eq.CO <sub>2</sub>		R410A / 0,67 / 1,4	R410A / 0,67 / 1,4
GWP			2088	2088
Dimension (w x h x d)	indoor	mm	485 x 49 x 610	485 x 49 x 610
	outdoor	mm	1018 x 259 x 650	1018 x 259 x 650
Package dimension (w x h x d)	indoor	mm	547 x 109 x 668	547 x 109 x 668
	outdoor	mm	1099 x 312 x 715	1099 x 312 x 715
Net / gross weight	indoor	kg	2,7 / 4,0	2,7 / 4,0
	outdoor	kg	42,5 / 49,0	42,5 / 49,0
Set temperature range	°C		16 ~ 30	16 ~ 30
Operating temperature range	cooling	°C	18 ~ 43	18 ~ 43
	heating	°C	2 ~ 24	2 ~ 24



The specification of products is subject to change based on further development of the units by the producer and can be changed without prior notice. Refer to rating label. Contains fluorinated greenhouse gases covered by the Kyoto Protocol. R410A (50% HFC-32, 50% HFC-125), GWP of refrigerant used: 2088. Noise is tested in the semi-anechoic room, so it should be slightly higher in the actual Operation due to environmental change. Power input is tested under standard condition.



SINCLAIR CORPORATION LTD.  
SINCLAIR-WORLD.COM | SINCLAIR-SOLUTIONS.COM  
EMAIL: INFO@SINCLAIR-SOLUTIONS.COM

This catalogue is informative only and does not constitute a binding offer from the side of Sinclair Corporation Ltd. The pictures of units and accessories are illustrative only. The Company takes no responsibility for any damage arising out of using or interpretation of this catalogue. The contents of this catalogue is protected by copyright of SINCLAIR CORPORATION LTD.